


# Product Environmental Profile

## Wiser Room Thermostat



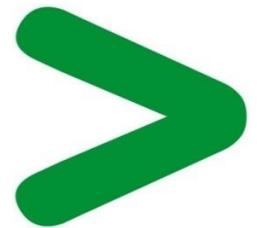


## General information

<b>Representative product</b>	Wiser Room Thermostat - WN704R0S0902
<b>Description of the product</b>	Wiser Room Thermostat has no wires, no installation and no mess. The wireless room thermostat is battery powered and, thanks to the handy table stand and wall clip, can be positioned anywhere. The large multi-colour screen and capacitive touch buttons provide the perfect combination of usability and iconic design. Connects to the HubR to control temperature actuation and boost features whilst monitoring temperature and humidity.
<b>Functional unit</b>	Control during 10 years the ambient temperature set by the user in N zones, in a range of X, with a temperature step of Y, according to Z temperature set points and characterized by a rated current of In and a current of IL when the contact is closed (heating/air conditioning is on).



## Constituent materials

<b>Reference product mass</b>	163.686 695848 including the product, its packaging and additional elements and accessories 92 g
-------------------------------	--

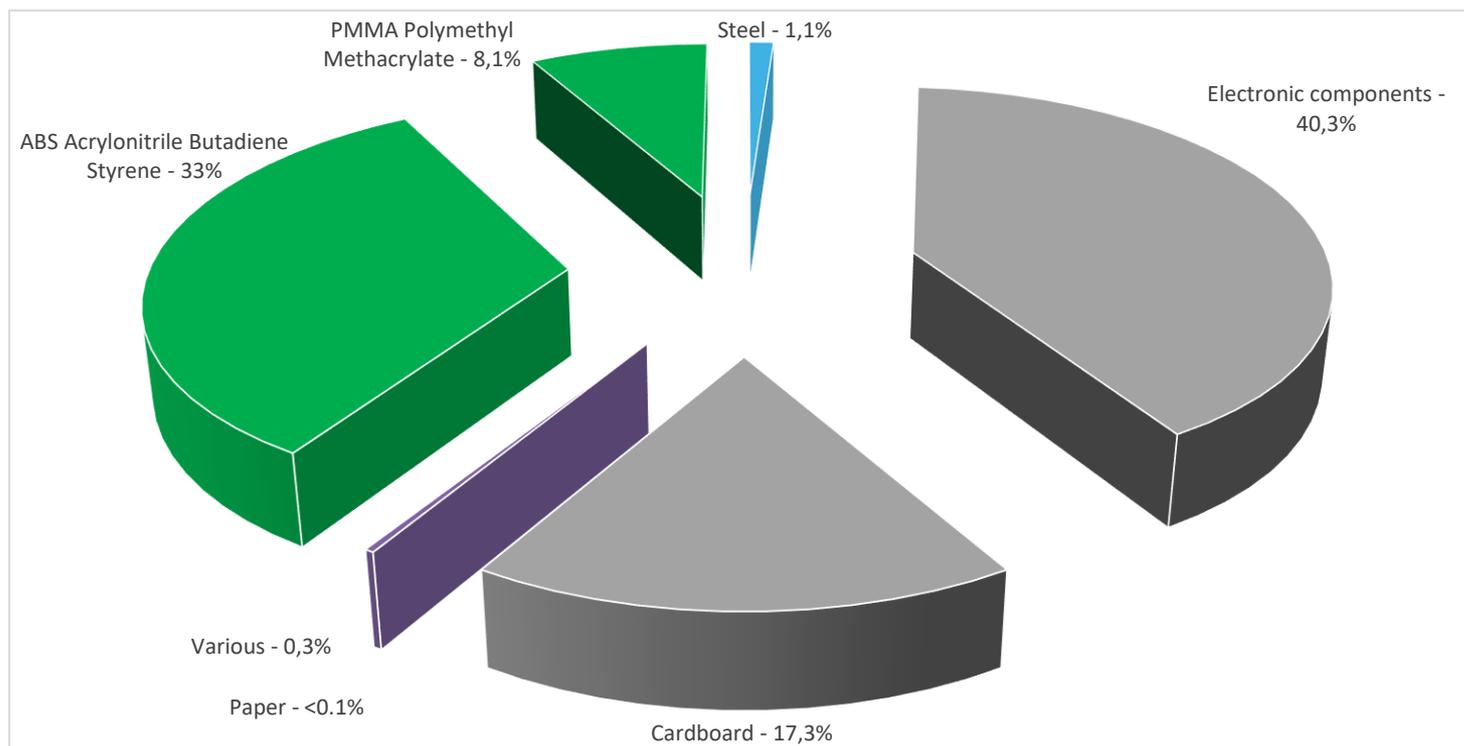

	Plastics	41,1%
	Metals	1,1%
	Others	57,9%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The Wiser Room Thermostat presents the following relevant environmental aspects


<b>Design</b>	Indicate all the eco-design improvements brought to the product at the design phase compared to previous offer range, refer to ecoDesign Way results
<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 28,3 g, consisting of Cardboard 100% Product distribution optimised by setting up local distribution centres
<b>Installation</b>	Ref WN704R0S0902 does not require any installation operations. The disposal of the packaging materials is accounted for during the installation phase (including transport to disposal).
<b>Use</b>	2 batteries of total 46.6g to be changed every 2 years
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains electronic card (19.2928g) and batteries (46.6g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a> Recyclability potential: <b>48%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



## Environmental impacts

<b>Reference life time</b>	10 years			
<b>Product category</b>	Programmable thermostats			
<b>Installation elements</b>	Ref WN704R0S0902 does not require any special component for the installation operations. The disposal of the packaging materials is accounted for during the installation phase (including transport to disposal).			
<b>Use scenario</b>	Load rate of the product: 100% of In during 100% of the RLT Load rate of the closed contact : 30% of IL during 14% of the RLT			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	Wiser Room Thermostat has no wires, no installation and no mess. The wireless room thermostat is battery powered and, thanks to the handy table stand and wall clip, can be positioned anywhere. The large multi-colour screen and capacitive touch buttons provide the perfect combination of usability and iconic design. Connects to the HubR to control temperature actuation and boost features whilst monitoring temperature and humidity.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: UK	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Wiser Room Thermostat - WN704R0S0902					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1,22E-03	1,22E-03	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1,61E-02	1,59E-02	9,64E-05	7,56E-06	3,63E-05	7,66E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	8,29E-03	8,16E-03	2,22E-05	7,70E-05	2,19E-06	2,46E-05
Contribution to global warming	kg CO <sub>2</sub> eq	1,42E+01	1,40E+01	2,11E-02	4,03E-02	8,71E-03	5,65E-02
Contribution to ozone layer depletion	kg CFC11 eq	1,14E-06	1,14E-06	0*	0*	5,67E-10	4,37E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2,21E-03	2,18E-03	6,88E-06	9,76E-06	2,00E-06	8,41E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	2,33E-01	2,01E-01	0*	0*	3,16E-02	6,48E-05
Total Primary Energy	MJ	1,97E+02	1,96E+02	2,99E-01	2,56E-02	1,74E-01	4,34E-01

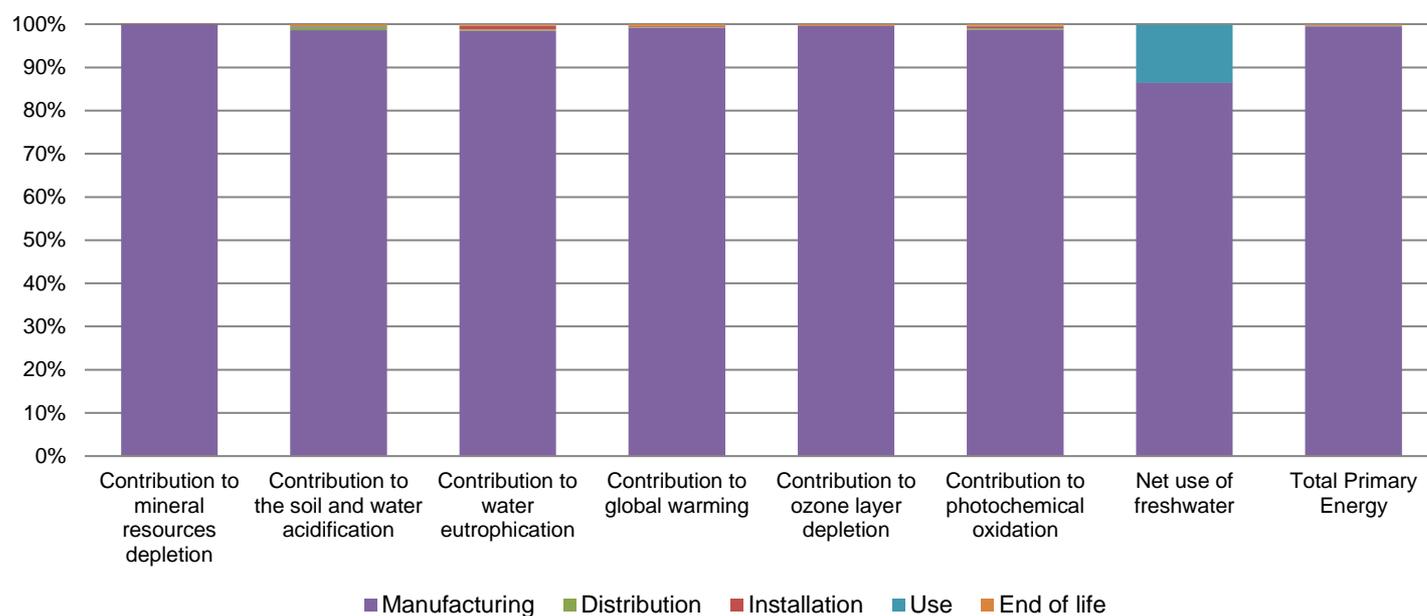

Optional indicators		Wiser Room Thermostat - WN704R0S0902					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2,14E+02	2,13E+02	2,97E-01	2,45E-02	9,88E-02	5,75E-01
Contribution to air pollution	m <sup>3</sup>	1,46E+03	1,45E+03	8,98E-01	1,85E-01	3,75E-01	4,03E+00
Contribution to water pollution	m <sup>3</sup>	8,32E+02	8,23E+02	3,47E+00	2,31E+00	3,59E-01	3,34E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	7,01E-04	7,01E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3,72E+00	3,70E+00	3,98E-04	0*	2,21E-02	3,83E-04
Total use of non-renewable primary energy resources	MJ	1,94E+02	1,93E+02	2,98E-01	2,56E-02	1,52E-01	4,34E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3,72E+00	3,70E+00	3,98E-04	0*	2,21E-02	3,83E-04
Use of renewable primary energy resources used as raw material	MJ	9,82E-04	9,82E-04	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,90E+02	1,89E+02	2,98E-01	2,56E-02	1,52E-01	4,34E-01
Use of non renewable primary energy resources used as raw material	MJ	3,55E+00	3,55E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*

Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1,30E+01	1,27E+01	0*	0*	0*	2,73E-01
Non hazardous waste disposed	kg	2,47E+00	2,40E+00	7,50E-04	2,84E-02	3,25E-02	8,18E-03
Radioactive waste disposed	kg	6,19E-04	5,94E-04	5,34E-07	8,27E-08	2,17E-05	2,84E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	7,49E-02	9,77E-03	0*	0*	0*	6,52E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	9,52E-03	0*	0*	0*	0*	9,52E-03
Exported Energy	MJ	4,16E-05	8,41E-06	0*	3,32E-05	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.6.0.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00380-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH33	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	07/2018	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2014			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			



Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

SCHN-00380-V01.01-EN

© 2017 - Schneider Electric – All rights reserved

07/2018