

Product Environmental Profile

RCCB MULTI 9 2P 25A 30MA I AC (S) OEM

This range consists of 2-pole and 4-pole, residual current circuit breaker with rated current from 16 to 100A, with sensitivities of 10 to 500 mA and type AC or type A.






General information

Representative product	RCCB MULTI 9 2P 25A 30MA I AC (S) OEM -M9R11225
Description of the product	<ul style="list-style-type: none"> • Protection of persons against electric shock by direct contact (30mA) • Protection of persons against electric shock by indirect contact (300mA) • Protection of installations against fire risks (300mA)
Functional unit	To provide protection of persons against electric shock by direct contact in 30mA and indirect contact in 300mA during 10 years in accordance with the relevant standards



Constituent materials

Reference product mass 199 g including the product, its packaging and additional elements and accessories

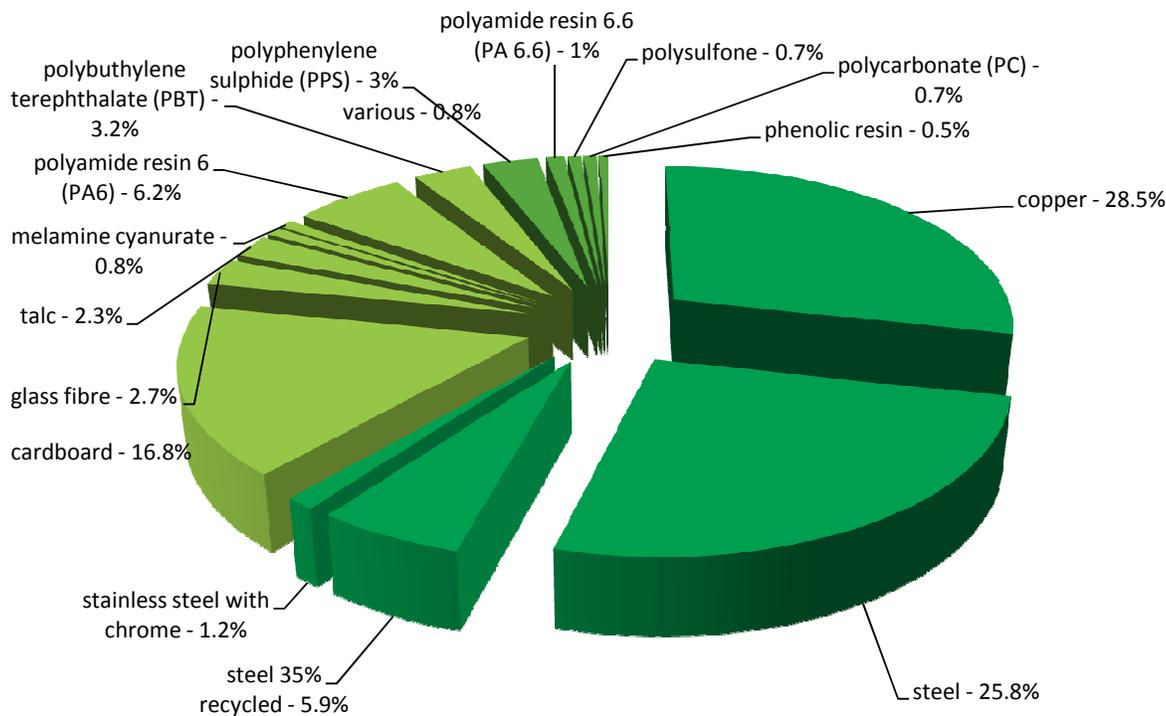

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The RCCB MULTI 9 2P 25A 30MA I AC (S) OEM presents the following relevant environmental aspects


Design	Indicate all the eco-design improvements brought to the product at the design phase compared to previous offer range
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 33 g, consisting of Cardboard (97%), paper (3%) Product distribution optimised by setting up local distribution centres
Installation	Ref M9R11225 doesn't require any installation operations
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 67% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	20 years			
Product category	Passive products - continuous operation			
Installation elements	No special components needed			
Use scenario	Product dissipation is 0.252 W full load, loading rate is 30% and service uptime percentage is 100%			
Geographical representativeness	Europe			
Technological representativeness	<ul style="list-style-type: none"> • Protection of persons against electric shock by direct contact (30mA) • Protection of persons against electric shock by indirect contact (300mA) • Protection of installations against fire risks (300mA) 			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used:	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		RCCB MULTI 9 2P 25A 30MA I AC (S) OEM - M9R11225					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	6.16E-04	6.15E-04	0*	0*	1.19E-06	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.99E-01	2.18E-03	1.17E-04	0*	1.97E-01	4.74E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	7.88E-03	4.51E-04	2.70E-05	2.34E-06	7.39E-03	1.24E-05
Contribution to global warming	kg CO ₂ eq	2.70E+01	8.52E-01	2.57E-02	3.15E-03	2.61E+01	2.12E-02
Contribution to ozone layer depletion	kg CFC11 eq	6.48E-06	1.45E-07	0*	0*	6.33E-06	1.04E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	9.54E-03	2.09E-04	8.37E-06	1.04E-06	9.32E-03	5.01E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	8.49E-02	1.69E-02	0*	0*	6.80E-02	2.05E-05
Total Primary Energy	MJ	5.46E+02	1.70E+01	3.63E-01	0*	5.28E+02	2.59E-01

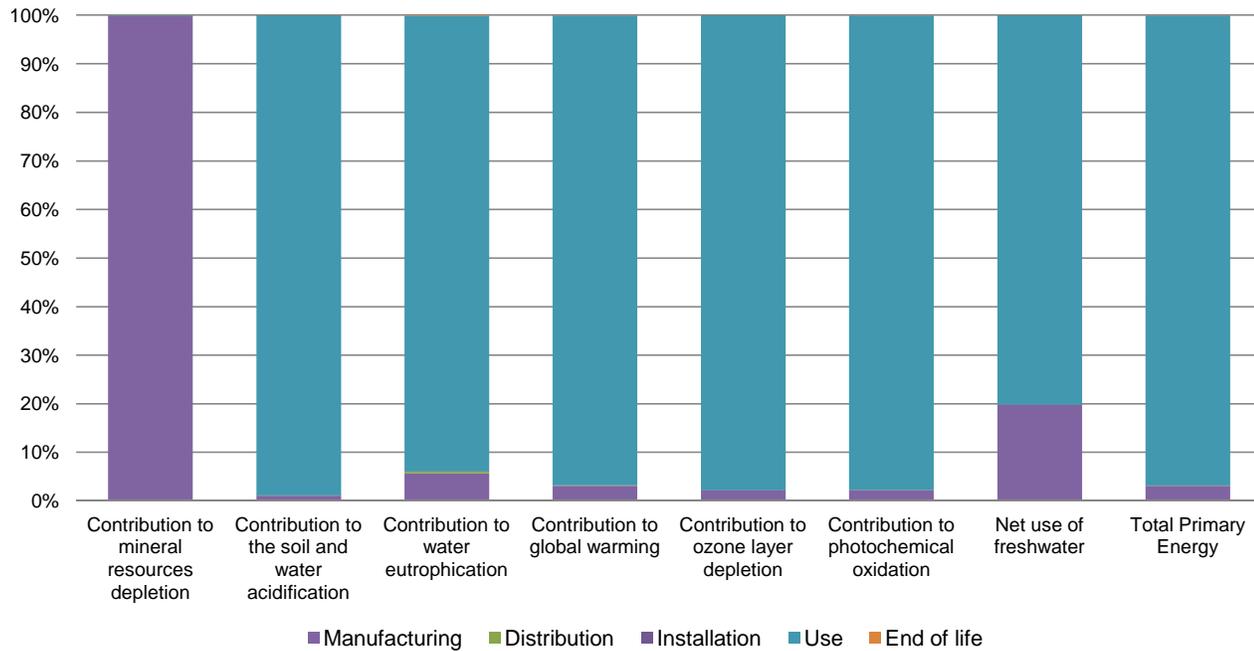

Optional indicators		RCCB MULTI 9 2P 25A 30MA I AC (S) OEM - M9R11225					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.80E+02	1.12E+01	3.61E-01	4.45E-02	2.69E+02	2.13E-01
Contribution to air pollution	m³	1.53E+03	4.08E+02	1.09E+00	3.48E-01	1.12E+03	1.68E+00
Contribution to water pollution	m³	1.17E+03	7.35E+01	4.22E+00	3.73E-01	1.09E+03	1.93E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.47E-02	1.47E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3.84E+01	5.64E-01	0*	0*	3.78E+01	0*
Total use of non-renewable primary energy resources	MJ	5.07E+02	1.65E+01	3.63E-01	5.39E-02	4.90E+02	2.59E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.78E+01	0*	0*	0*	3.78E+01	0*
Use of renewable primary energy resources used as raw material	MJ	5.80E-01	5.80E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5.06E+02	1.55E+01	3.63E-01	5.39E-02	4.90E+02	2.59E-01
Use of non renewable primary energy resources used as raw material	MJ	1.01E+00	1.01E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.31E+01	1.28E+01	0*	6.60E-02	0*	2.14E-01
Non hazardous waste disposed	kg	9.86E+01	1.05E+00	0*	0*	9.75E+01	0*
Radioactive waste disposed	kg	7.96E-02	1.49E-04	0*	0*	7.95E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.22E-01	1.55E-02	0*	0*	0*	1.07E-01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2.36E-03	2.99E-04	0*	0*	0*	2.06E-03
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

Due to the products linked to this PEP are all have similar function and similar structure, the extrapolation rules must be adopted here to assess environmental impact for group of product. Depending on the impact analysis, the environmental indicators (without RMD) of other products in this family may be proportional extrapolated by energy consumption values. For RMD, impact may be proportional extrapolated by mass of the product.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration N°</i>	SCHN-00022-V01.01-EN	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Verifier accreditation N°</i>	VH08	<i>Supplemented by</i>	PSR-0005-ed1-EN -2012 12 11
<i>Date of issue</i>	03-2016	<i>Information and reference documents</i>	www.pep-ecopassport.org
		<i>Validity period</i>	5 years
<i>Independent verification of the declaration and data, in compliance with ISO 14025 : 2010</i>			
<i>Internal</i>		<i>External</i>	X
<i>The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)</i>			
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »</i>			
			

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00022-V01.01-EN

Published by Schneider Electric

© 2015 - Schneider Electric – All rights reserved

03-2016